

ART 126GB DN400-600

Ductile Iron Butterfly Valve Wafer Type




Features

- Universal flange mounting PN10, PN16, ANSI 150
- BS5155 (BS EN 593)
- ISO 5211 direct mount
- Epoxy coat finish

Technical data


Max pressure: 16 Bar

Working temp: -10°C to +110°C

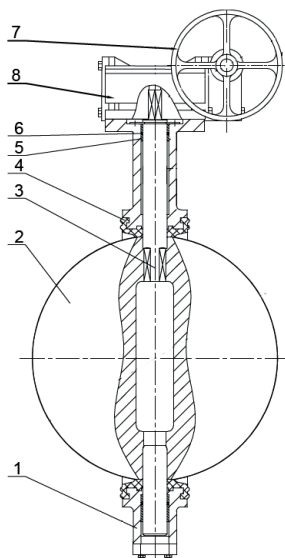


N. Part Name Materials

1	Body	Ductile Iron GGG40
2	Disc	Stainless Steel 316
3	Shaft	Stainless Steel 410
4	Seat	EPDM
5	Bushing	PTFE
6	O-Ring	EPDM
7	Handwheel	Cast Iron
8	Gearbox	Cast Iron

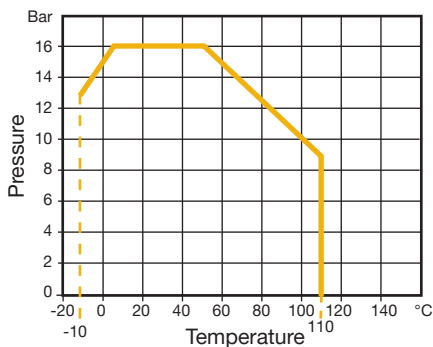

ART 126GB DN400-600

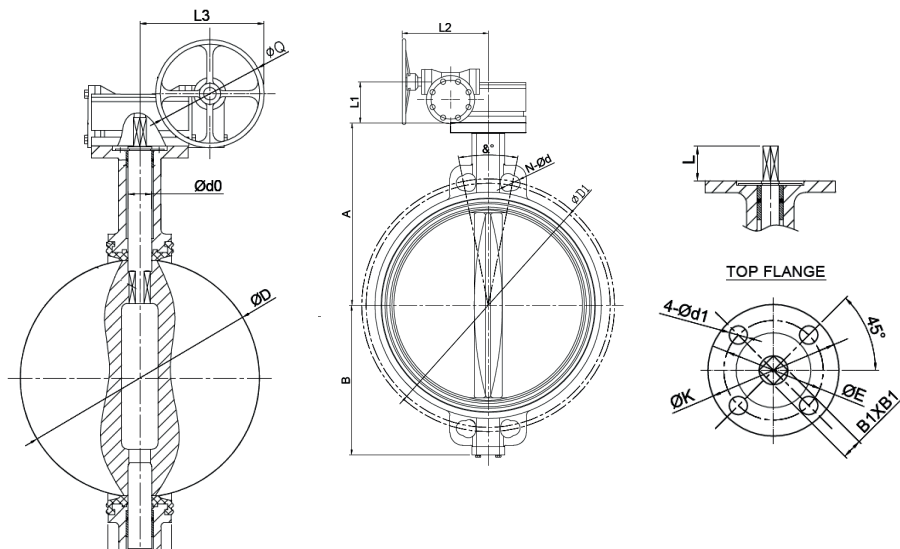

DN	16"	18"	20"	24"
A	405	422	480	562
B	321	328	361	459
C	102	114	127	152
D	390.0	441.0	492.0	592.5
L	50	50	60	60
B1	27	27	36	36
d0	37.95	42.86	45.72	53.98
D1 PN10	515	565	620	725
D1 PN16	525	585	650	770
D1 ANSI 150	540.0	578.0	635.0	749.5
N-Ød PN10	4-28	4-28	4-28	4-31
N-Ød PN16	4-31	4-31	4-34	4-37
N-Ød ANSI 150	4-28.5	4-32	4-32	4-35
8° PN10	22.5	18	18	18
8° PN16	22.5	18	18	18
8° ANSI 150	22.5°	22.5°	18°	18°
L1	110	110	110	128
L2	254	254	254	301
L3	326	326	326	392
Q	290	290	290	385