


ART 6698

Foot Valve




Technical data

Max pressure: 20 Bar
Working temp: 0°C to +100°C

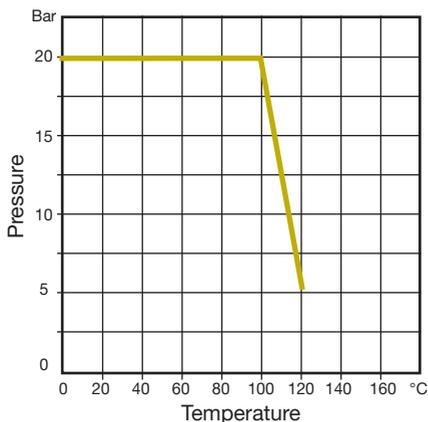

Features

- PN20 Brass Spring Check Valve with Stainless Steel Mesh Filter
- Screwed BSP Parallel (ISO 228/1)
- Check Valve has Brass Body and Brass Disc

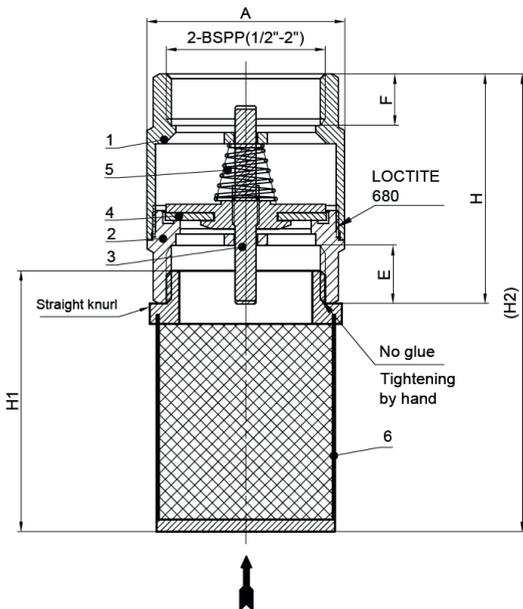

N.	Part Name	Materials
1	Body	Brass CW617N
2	Bonnet	Brass CW617N
3	Disc Holder	Brass CW617N
4	Disc	NBR
5	Spring	Stainless Steel 304
6	Mesh Filter	Stainless Steel 304 & ABS

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A	32.5	39.0	45.0	55.5	59.5	80.0
H	48.5	52.2	55.5	64.0	69.0	82.0
E	12.5	14.0	12.0	16.5	17.5	20.0
F	12.5	15.0	15.0	16.5	15.5	21.0
H1	39	45	52	61	69	83
(H2)	79.5	89.2	98.0	115.5	128.0	153.0
Kgs	0.15	0.18	0.27	0.41	0.51	0.91

V3. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.