




SF Screwed Flange



Features

- Screwed to ISO 7/1 Rp
- PN16 type 13 raised face BSPT threaded flange
- 316L stainless steel
- Flanged to EN 1092-1 standard
- BS EN 10204 certification available

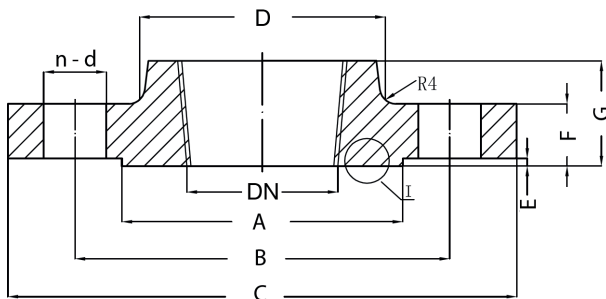

DN	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"	5"	6"
A	45	58	68	78	88	102	122	138	158	188	212
B	65	75	85	100	110	125	145	160	180	210	240
C	95	105	115	140	150	165	185	200	220	250	285
D	35	45	52	60	70	84	104	118	140	168	195
E	2	4	2	2	3	3	3	3	3	3	3
F	16	18	18	18	18	18	18	20	20	22	22
G	22	26	28	30	32	28	32	34	40	44	44
n-D	4-14	4-14	4-14	4-18	4-18	4-18	4-18	8-18	8-18	8-18	8-22
Bolts	4 x M12	4 x M12	4 x M12	4 x M16	4 x M16	4 x M16	4 x M16	8 x M16	8 x M16	8 x M16	8 x M20
Kgs	0.72	1.04	1.25	1.81	2.06	2.39	2.97	3.78	4.38	6.07	7.24

