

EasyLink

H Block Screwed




Features

- Material DZR Brass CW602N
- Female – ISO 228/1 G Parallel
- Male – ISO 7/1 R Taper
- Extended Levers as standard

Technical data

Max pressure: 25 Bar
Working temp: 0°C to +120°C

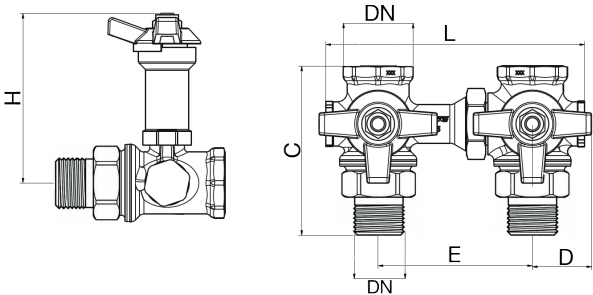

DN	1/2"	3/4"	1"
Ø	15	20	25
C	92	95	98
E	80	80	80
D	31	31	31
L	134	134	134
H	88	88	88
Kgs	1.15	1.35	1.65

