


ART 1270

Bibcock Tap with Hose Union

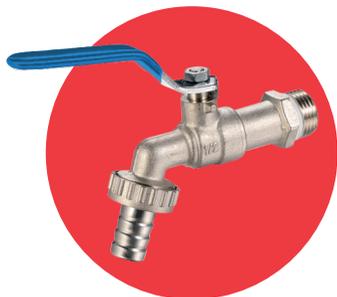


Technical data

Max pressure: 16 Bar

Working temp: 0°C to 110°C

Features

- Screwed BSP Parallel (ISO 228/1)

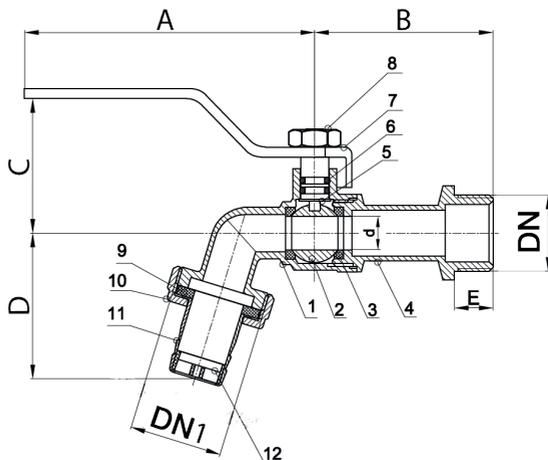

| Size | 1/2" x 3/4" | 3/4" x 1" | 1" x 1.1/4" |
|------|-------------|-----------|-------------|
| DN | 1/2" | 3/4" | 1" |
| DN1 | 3/4" | 1" | 1.1/4" |
| A | 85.0 | 85.0 | 106.5 |
| B | 52 | 58 | 59 |
| C | 37 | 52 | 55 |
| D | 46.5 | 49.0 | 54.5 |
| d | 10.0 | 12.0 | 13.5 |
| E | 12 | 14 | 14 |
| Kgs | 0.18 | 0.25 | 0.38 |

| N. | Part Name | Materials | N. | Part Name | Materials |
|----|-----------|-------------------------|----|-------------|---------------------|
| 1 | Body | DZR Brass Nickel Plated | 7 | Handle | Carbon Steel Q235A |
| 2 | Ball | Brass Chrome Plated | 8 | Screw | Stainless Steel 304 |
| 3 | Seat | PTFE | 9 | Washer Ring | NBR |
| 4 | Bonnet | DZR Brass Nickel Plated | 10 | Union Nut | Brass Nickel Plated |
| 5 | Stem | Brass Nickel Plated | 11 | Hose Tail | Stainless Steel 304 |
| 6 | O-Ring | NBR | 12 | Insert | PP (White) |

V3. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.