




ART 58 PN25

PN25 DZR Brass Y Strainer



Features

- Screwed BSP Parallel (ISO 228/1)
- Brass body
- Stainless steel mesh
- BS EN 12266

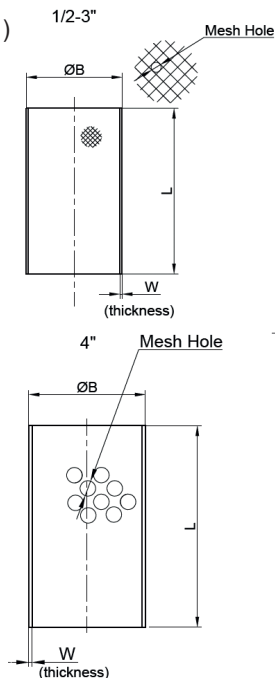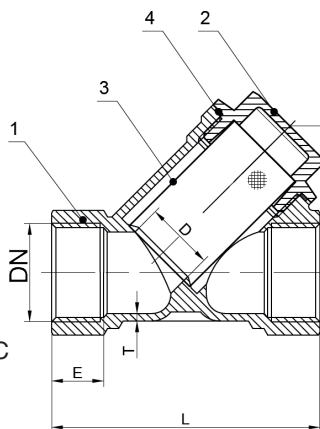


Technical data

Max pressure: 25 Bar

Working temp: -10°C to +170°C

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
L	57.0	72.0	74.5	95.0	105.0	129.0
H	34.0	39.5	43.0	54.0	61.5	74.5
D	15.0	18.5	21.0	29.0	32.0	46.0
T	2.0	2.2	2.5	2.7	2.9	3.3
E	11.5	14.0	16.0	18.0	18.0	21.0
B	18	23	25	34.5	40.5	50.5
L	33.2	40	40	49	58	69
W	0.3	0.3	0.3	0.5	0.5	0.5
Mesh Hole	Ø0.6	Ø0.6	Ø0.6	Ø0.85	Ø0.85	Ø0.85
KV	4.19	6.48	9.41	15.76	18.51	27.93

N.	Part Name	Materials
1	Body	DZR Brass CW602N
2	Bonnet	DZR Brass CW602N
3	Strainer	Stainless Steel 304
4	Gasket	PTFE

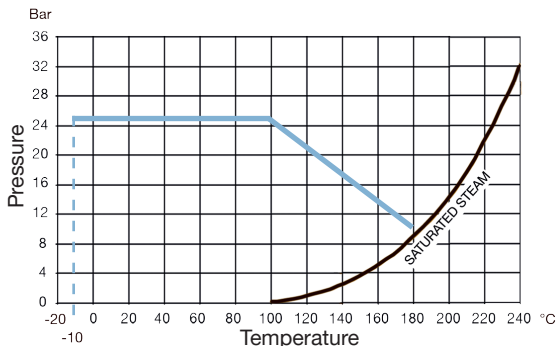

V1. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.